



SRM-27R

27" Sunlight Readable HD LCD Monitor

- True Sunlight-Readable HD Monitor
- 1,000 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- Dual Speakers
- Video Inputs: VGA, HDMI, DisplayPort
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The SRM-27R Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-27R Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.


Specifications

Model	SRM-27R
LCD Panel	27" Color TFT LCD
Display Resolution	1920 x 1080 (1080p/60 Full HD)
Display Area	23.52" x 13.25" (597.6 x 336.15 mm)
Pixel Pitch	0.311mm
Display Colors	16:7 M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	1,000:1
Viewing Angle	170° (H) x 160° (V)
Response Time	5 ms Trf
Control	OSD (On-Screen Display) via Pushbuttons
Video Input Connectors	VGA, HDMI, DisplayPort
Audio	Dual Rear Speakers
Power Requirement	12 VDC / 90-240 VAC with included power brick
Power Consumption	45W
Enclosure	ABS
Mounting	Via Included Base or 100 x 100 mm / 200 x 100 VESA Mount
Operating Temperature	14° to 122° F / -10 to 50° C
Dimensions	25.38" (W) x 15.25" (H) x 2.63" (D) / 644.65 (W) x 387.35 (H) x 66.80 (D) mm
Weight	14.3 lbs. / 6.48 kg

SRM-27R

27" Sunlight Readable LCD Monitor

Dimensions

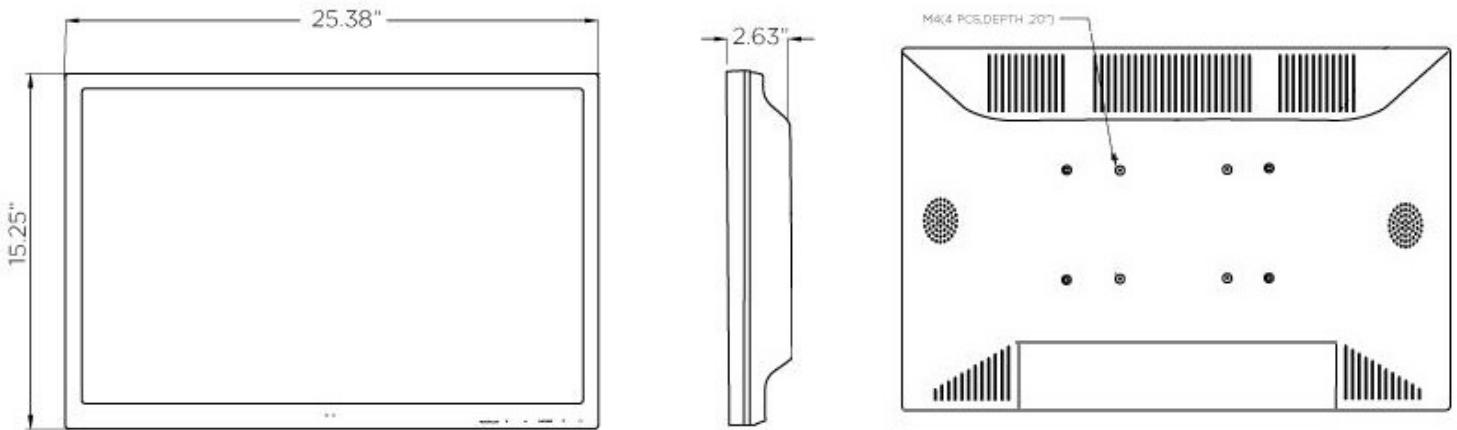

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- HDMI Cable
- Audio Cable
- Tabletop Base

Available Options:

- DVI Input
- Open-Frame Configuration
- Ambient Light Sensor
- MVA-Type Panel for 178° x 178° Viewing Angle
- Protective Anti-Reflective Glass
- Wall Mount Brackets
- Remote Control
- Private Label
- Other Customer - Specific Modifications