



### VM-11.6H

#### 11.6" Industrial-Grade LCD Monitor

- 11.6" Color LCD Monitor
- Resolution: 1366 x 768
- Aspect Ratio: 16:9
- LED Backlights
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Lockable OSD (On-Screen Display) Controls
- 3 Year Warranty
- Touch Screen Option Available

The VM-11.6H LCD monitors offer exceptional image quality and dependable 24/7/365 operation. These monitors are ideally suited wherever you need detailed, high quality images in a rugged metal enclosure. The VM-11.6H monitors have been successfully used with machine vision systems, in police cars, public transportation, manufacturing plants and studios. They can also be private-labeled with your company name, logo and model number.


The VM-11.6H LCD monitors are built with industrial-grade components, and receive our exclusive **TRU-Tuff** treatment. The **TRU-Tuff** process includes: RTV silicone on all connections and critical components; all wires are dressed, tie-wrapped and secured; and ThreadLock on all screws. This, plus the rugged powder-coated steel enclosure, ensures maximum shock and vibration resistance. These monitors are ideal for a wide range of demanding applications including industrial, military, law enforcement, aviation, marine, inspection, surveying, cranes, oceanic, entertainment and transportation. **TRU-Vu** monitors are backed by our full 3-Year Warranty.

### Specifications

MODEL	VM-11.6H
LCD Panel	11.6" LCD with LED Backlights
Resolution	1366 x 768
Viewable Area	10.15" (W) x 5.74" (H) (258 x 146 mm)
Pixel Pitch	0.1875 (H) x 0.1875 (V)
Display Colors	16.2M
Aspect Ratio	16:9
Brightness	350 nits
Contrast Ratio	500:1
Viewing Angle	120° (H) x 115° (V)
Response Time	12 msec Trf
Control	OSD (On-Screen Display)
Video Inputs	VGA, HDMI
Power Requirement	11-28 VDC (90-240 VAC with optional power adapter)
Power Consumption	19W
Enclosure	Powder-Coated Steel
Mounting	75 x 75 mm VESA
Operating Temperature	-4° to +158° F / -20° to +70° C
Shock	100G (6 ms, X-Y-Z)
Vibration	3G, 33-40 Hz
Dimensions	11.29" (W) x 7.16" (H) x 1.57" (D) / 287 (W) x 182 (H) x 40 (D) mm
Weight	3.6 lbs. (1.63 kg)

## VM-11.6H 11.6" Industrial-Grade LCD Monitor

### Dimensions:

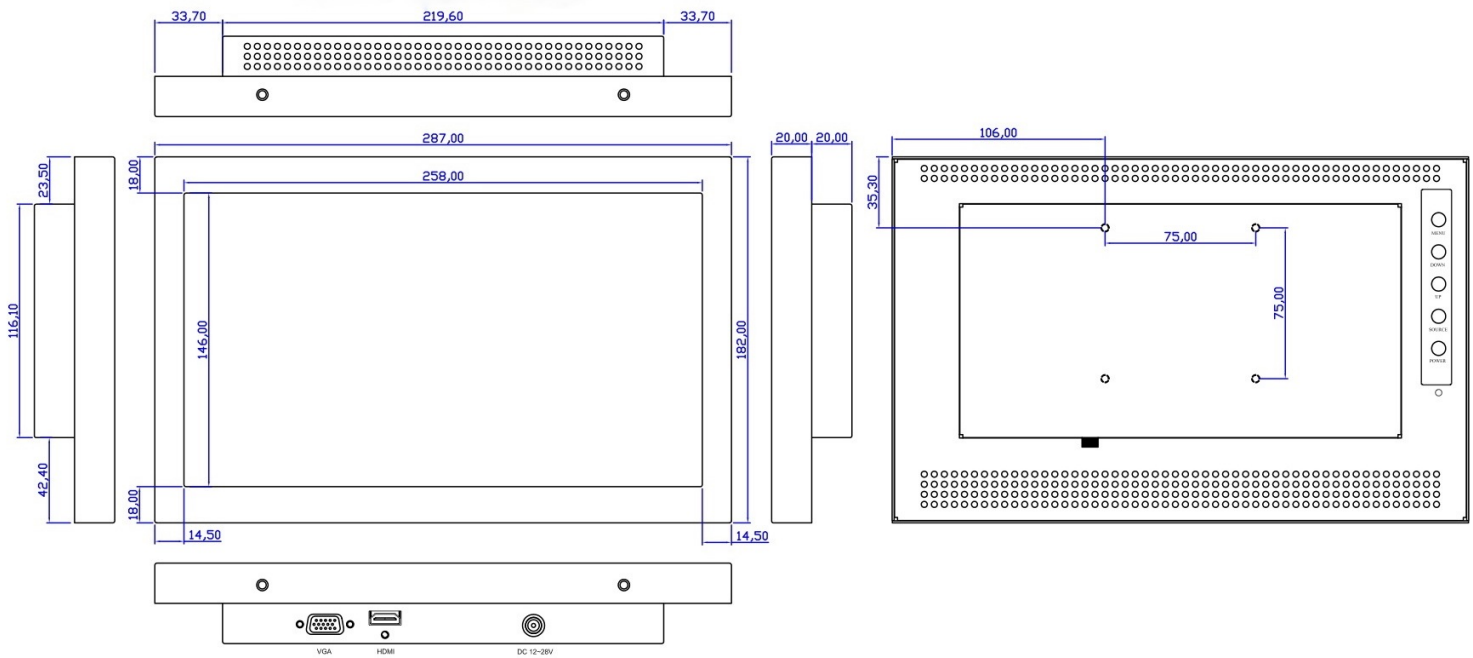

### Standard Accessories:

- VGA Cable
- HDMI Cable
- DC Power Pigtail

### Available Options:

- Capacitive Touch Screen
- Optical Bonding
- Protective/Anti-Glare Glass
- DVI Video Input
- HD-SDI Video Input
- 90-240 VAC Power Adapter (PS-12)
- Open-Frame Configuration
- Private Label
- Wall Mount or Tabletop Bracket
- Other Customer - Specific Modifications